

Recommended Applications

- Retail high traffic areas
- Hospitality rooms, public space, restaurants
- Corporate break rooms, offices, lobbies
- Education dormitories, student centers, classrooms
- Senior Living all spaces within independent living properties
- Over access floors

Selling Features

- Commercial grade wear layer and M-Force[™] Enhanced Urethane
- Oversize formats look great and install over large areas quickly
- Non-skid backing eliminates the need for adhesive
- Immediate move-in
- Installs over slabs with up to 95% RH
- IIC Rating of 57 without underlayment
- 59% Recycled Content and FloorScore® Certified
- QuickShip

Hot and Heavy

Hot & Heavy Floating LVT lives up to its name. The bold, oversized formats are the hottest thing in flooring and are made possible due to the loose lay construction. Each jumbo tile and plank is coated with a non-skid backing that together, with the substantial weight of the product, keep tiles on the floor under true commercial traffic. Hot & Heavy not only looks amazing, but works to reduce sound transfer and subfloor prep for a fashionable, practical commercial flooring solution.

Style Name Style Number Brand Product Type

Hot and Heavy C0009 (Secoya); C0010 (Bolder) Mohawk Group - Hard Surface Loose Lay Luxury Vinyl Tile



DESIGN

Overall Gauge Wear Layer Finish Texture Colors Available / Size Secoya

Bolder Actual Size Secoya Bolder Antimicrobial Packaging

Secova Bolder Installation

Recommended Adhesive

.20" (5mm)

M-Force™ Enhanced Urethane Wood Emboss; Light Emboss

Each color is only available in the size shown

9 colors of 9"x 59" (nominal) 8 colors of 36" x 36"

235mm x 1505mm 914.4mm x 914.4mm Yes

22.84 sf / ctn, 6 pieces / ctn, 40.78 lbs / ctn 36 sf / ctn, 4 pieces / ctn, 63.48 lbs / ctn

Loose Lay with Perimeter Glue

Perimeter glue only with MS160 Spray or M700



PERFORMANCE

Construction Commercial grade floating luxury vinyl tile Classification ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed

Squareness ASTM F2055 - Passes - 0.010 in. max ASTM F2055 - Passes - \pm 0.016 in. per linear foot Size and Tolerance ASTM F386 - Passes - Nominal ± 0.005 in. Thickness

Flexibility ASTM F137 - Passes - ≤ 1.0 in., no cracks or breaks Dimensional Stability ASTM F2199 - Passes - ≤ 0.024 in. per linear foot Static Load Limit ASTM F970 - Passes - modifies - 1000 psi Residual Indentation ASTM F1914 - Passes - Average less than 8%

Slip Resistance Passes - .7 Dry/.8 Wet

ASTM F925 - Passes - No Change or Slight Change Resistance to Chemicals

Resistance to Light ASTM F1515 - Passes - $\Delta E \le 8$ Resistance to Heat ASTM F1514 - Passes - ∆E ≤ 8

Critical Radiant Flux ASTM E648 - Passes - ≥.45 watts/cm2, Class 1 IIC Rating 57 (over 6" concrete and drop ceiling)



SUSTAINABILITY

Certification FloorScore® Certified Recycled Content Minimum 37% Pre-Consumer, 22% Post-Consumer 100% virgin vinyl wear layer




SERVICE

Warranty 10 Year Commercial

Hot and Heavy

Construction The Hot & Heavy collection is designed with a 5 mm thickness that is more forgiving of subfloors than other luxury vinyl tiles. Hot & Heavy has tested for great acoustics, achieving a 57 IIC rating without using underlayments. The collection is made with 59 percent recycled content, an added antimicrobial and is FloorScore® Certified. The M-Force™ Enhanced Urethane Finish offers protection under heavy foot traffic and is polish optional.

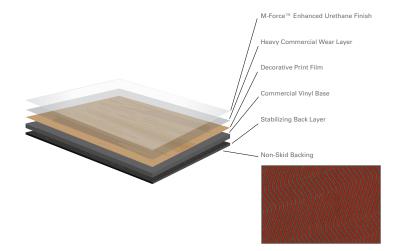

Secoya The 9" x 59" plank replicates a modern hardwood look and is available in a variety of textures from linear to hand-scraped. Each plank is accentuated with a beveled edge to showcase the large format. Oak and Cherry species are offered in a full range of colors for an authentic wood visual.

Colorways available in 9" x 59" planks (nominal)



Bolder The 36" x 36" tiles have the effect of polished concrete slabs, but install in a fraction of the time and expense. This modern format looks bold and interesting and serves to install quickly across large areas.

Colorways available in 36" x 36" tiles



Colors shown may vary according to production run.